BLASTING NOZZLES

DTI INSIDE ENSURES:

FOR WATERJETTING APPLICATIONS







PRODUCT FEATURES AND BENEFITS

QUALITY THAT BLASTS AWAY INDUSTRY NORMS

dti™ manufactures each of our standard waterjetting nozzles with the highest quality materials and precision machining techniques in the industry. Each nozzle is equipped with heat treated, stainless steel mounts, aerospace grade titanium retainers, and 100% quality inspection. Every step dti™ takes above standard quality norms, ensures:

MAXIMIZED NOZZLE LIFE CONSISTENT JET STREAM PROFILE AND COHERENCY REDUCED DOWNTIME SUPERIOR BLASTING PERFORMANCE OPTIMIZED PRODUCTIVITY

PERFORMANCE VERSATILITY

ALIGN ORIFICE PERFORMANCE TO JOB PERFORMANCE NEEDS

dti™ offers standard blast nozzle assemblies with your choice of orifice material. For unbeatable lifetimes and optimum performance consistency, tetraCORE™ orifices minimize downtime and maximize productivity. For less demanding jobs, dti™ Sapphire orifices are precision manufactured to ensure quality and performance.

ORIFICE MATERIALS

SAPPHIRE PRODUCT FEATURES

- Utility Grade: Long life
- High jet stream coherency
- Max jet stream length
- Premier sapphire material quality
- Aerospace grade mounting & retaining materials
- 100% quality inspected

tetraCORE™ PRODUCT FEATURES

- Performance Grade: 10X longer life than Sapphire
- 100% tested at 50K psi
- Zero ID edge degradation over use
- Premium jet stream coherency & integrity
- Optimized jet stream length and consistency
- Maximized uptime and productivity



DTI-82

Thread Pitch: 3/8" - 24 **Description**: 3/8" hex head Sealing Angle (included): 84° Similar to: 4065, 4067



DTI-94

Thread Pitch: M10 x 1.5 Description: 5mm hex key slot Sealing Angle (included): 58° **Similar to Form**: 21, 3261, 3688, Type 965



DTI-88

Thread Pitch: 3/8" - 24 **Description**: 3/8" hex head Sealing Angle (included): 112° **Similar to**: 3024, 3546, Type 972



DTI-95

Thread Pitch: 7/16" - 20 Description: 7/16" hex head,

O-Ring Seal



DTI-89

Thread Pitch: 7/16" - 20 **Description**: 7/16" hex head Sealing Angle (included): 112° **Similar to**: 3076, 3604, Type 975



DTI-97

Thread Pitch: 1/4" - 28 **Description**: 1/4" hex head Sealing Angle (included): 112° Similar to: 3026, 3606



DTI-90

Similar to: 3727

Thread Pitch: M10 x 1.5 Description: 5mm hex key slot, Shortened Sealing Angle (included): 58°



DTI-87

Description: Long Stem Sealing Angle (included): 84° Similar to: 2908



DTI-91

Thread Pitch: M10 x 1.5 **Description**: 5mm hex key slot Sealing Angle (included): 66°



DTI-58

Description: Long Stem Sealing Angle (included): 60° Similar to: 2720, Type 257

NEW MATERIAL GRADE tetraCORETM


THE AFFORDABLE SAPPHIRE REPLACEMENT. DELIVERING A NEW TIER OF WATERJETTING PERFORMANCE.

Precision engineered to offer ultimate performance consistency, tetraCORE™ is a tetrahedrally bonded material that resists erosion, chipping and fracturing to decrease down time, optimize productivity and reduce operating cost. tetraCORE™ approaches the hardness and wear resistance of diamond, at an affordable price point, allowing you to go the distance with your production without costly downtime to change out unreliable orifices.

LIFETIME COMPARISON

WHAT DOES YOUR DOWNTIME REALLY COST?

ELAPSED TIME IN HOURS

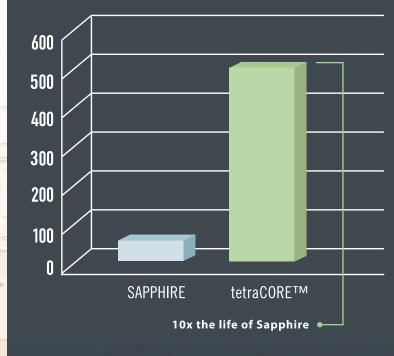





CUSTOMIZE YOUR ORDER

CHOOSE YOUR ORIFICE, STYLE & SIZE

PART NUMBER CONFIGURATION

XX - XX - XX

ORIFICE TYPE - NOZZLE STYLE - SIZE

TA = tetraCORE™ Orifice

SA = Sapphire Orifice

PL = Plug, NO ORIFICE

STANDARD ORIFICE SIZES

0.006" - 0.035"

ADDITIONAL SIZES 0.003"-0.005" | 0.036"-0.070"

CUSTOMIZATION

dti™ will work with you to meet your exact waterjet nozzle requirements. Contact us about our custom nozzle options, including:

- Custom designs, orifice sizes and dimensions
- Specialized mount, retainer, and/or orifice materials
- Additional testing options
- Custom packaging, labeling and/or laser marking





dti™ is a manufacturer of waterjet orifices for OEMs and Distributors only. To place an order, contact your waterjet parts supplier or contact us for your nearest authorized dealer.

DIAMOND TECHNOLOGY INNOVATIONS

1043 Kaiser Rd SW Olympia, WA 98512

info@dtilNSIDE.com dtilNSIDE.com 360.866.1337